

# Configure my Mifi Device

(Alcatel or Huawei Mifi device)

# 30 Days Mifi Plans

Rate	Data Volume	Key Word	
2,000VT	3 GB	Buy 3GB	FREE FACEBOOK
3,000VT	5 GB	Buy 5GB	
4,000VT	8 GB	Buy 8GB	
6,000VT	15 GB	Buy 15GB	


## Launch Offer

Alcatel Mifi Device + LTE Sim card + Alcatel 1050D = 8,250VT **5,000VT**

Huawei Mifi Device + LTE Sim Card + Alcatel 1050D = 13,750VT **9,750VT**

Connect Everywhere

Up to 10 devices

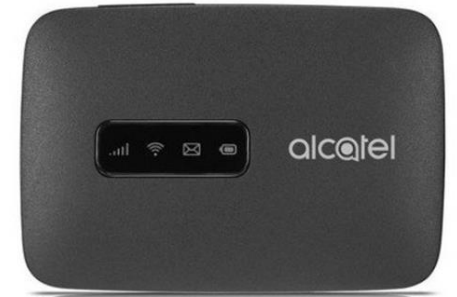

# Configure Mifi Device

## Configure the Mifi Device – Alcatel

1. Switch on the Mifi Device, the Wi-Fi function of the Mifi will turn on automatically
2. When a Wifi-device establishes a connection to the Mifi for the first time, you may need to enter the default Service set identifier (SSID) and wireless network encryption key. Write these down for use during setup. this is available on the back of the device (battery holder)


1. Set up a new SSID and network encryption key for your customer



4. Log in on the Web management page of the Device- address: **192.168.1.1**, default username: **admin**, Password: **admin**
5. Go to **Home Menu** and to **Settings**. On the **Profile Management** set the Profile Name: **BBD Prepaid**, Dial Number **\*99#**, APN: **Ltebbd.tvl.vu** and **save** and set to **default**.
6. When connect to internet, the service is ready to use
7. If you have issue connecting to internet after switching OFF and ON the device, always check your settings to ensure the APN is correct.

# Web Management Portal Home Page

Address: <http://192.168.1.1> password: Admin

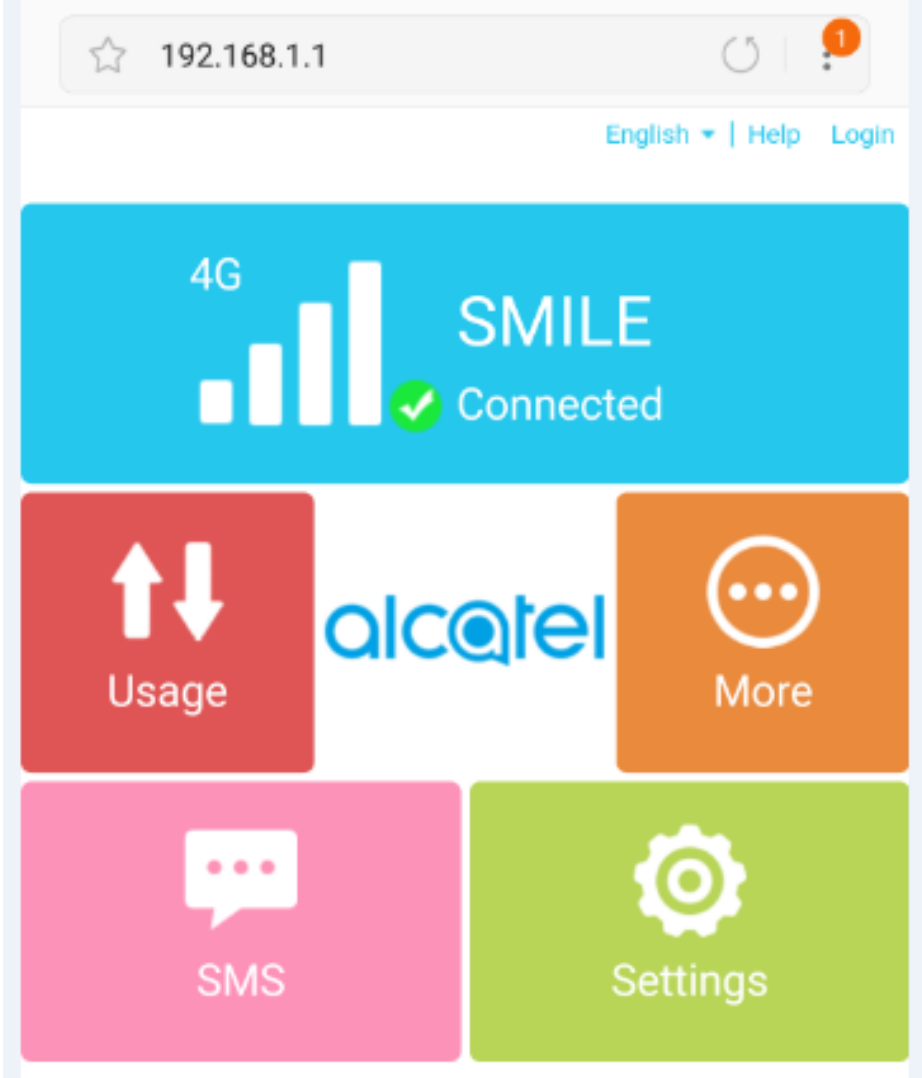

# To Configure Alcatel Mifi Device

The home screen of the Alcatel Mifi device's web interface. At the top, the IP address 192.168.1.1 is displayed. Below it, there are links for 'English', 'Help', and 'Login'. A large blue banner shows '4G' with a signal strength indicator, 'SMILE', and a green checkmark indicating 'Connected'. Below the banner are four main menu buttons: 'Usage' (red), 'SMS' (pink), 'More' (orange), and 'Settings' (green). The 'Settings' button has a large blue number '1' next to it.

The settings menu of the Alcatel Mifi device. The IP address 192.168.1.1 is at the top. The 'alcatel' logo is on the left, and a status bar with '4G' and various icons is on the right. A list of settings options is shown in green boxes: 'Settings', 'WiFi Settings', 'Login Settings', 'Profile Management', 'PIN Code Settings', 'Connection Mode', 'Network Mode', 'Advanced Settings', and 'About'. A large blue number '2' is placed over the 'Profile Management' option.

The profile management screen of the Alcatel Mifi device. The IP address 192.168.1.1 is at the top. The 'alcatel' logo and status bar are on the left. A green header shows 'Settings' and a large blue number '3'. Below the header is the 'Profile Management' section. It includes a dropdown menu for 'Profile Management' (currently set to 'Broadband Prepaid (C)'), a text input for '\*Profile Name' (containing 'Bbd prepaid'), a text input for '\*Dial Number' (containing '\*99#'), a text input for 'APN' (containing 'Ltebbd.tvl.vu'), a text input for 'User name', a text input for 'Password', and a dropdown menu for 'Protocol' (set to 'None'). A note at the bottom states: 'Note: The max number of the profile you can create is 15.' Below the note are buttons for 'New', 'Edit', 'Save', 'Delete', and 'Set Default'.

# Configure Mifi Device

3.

## Sales Agent Configure the Mifi Device – Huawei

1. Locate the important information on the label at back of the device(battery holder), example as below:

IP: 192.168.8.1

User: admin

Password: admin

SSID: Huawei – 4C8B

Wifi Key: 19127633

2. Log in on the Web management page of the Device- address: **192.168.8.1**, default username: **admin**, Password: **admin**

3. Go to **Home Menu** and to **Settings**. On the **Dial-up** tap, click on the Profile management set the Profile Name: **BBD prepaid**, APN: **Ltebbd.tvl.vu** and **apply**

4. When connect to internet, the service is ready to use

Help Log In

HUAWEI

Home | Statistics | SMS | Update | **Settings** | More

SMILE

4G

Connected  
[Connection Settings](#)

1

**Current connection**

Received/Sent:	58.01 KB / 61.06 KB
Duration:	00:05:54

**WLAN status**

WLAN status:	On
Current WLAN users:	2

Help admin Log Out

HUAWEI

Home | Statistics | SMS | Update | **Settings** | More

Quick Setup

Dial-up

Mobile Connection

**→ Profile Management**

Network Settings

Ethernet

WLAN

Security

System

## Profile Management

2

Profile name: Bbd Prepaid

User name:

Password:

APN: Ltebbd.tvl.vu

Help admin Log Out

HUAWEI

Home | Statistics | SMS | Update | **Settings** | More

Quick Setup

Dial-up

**→ Mobile Connection**

Profile Management

Network Settings

Ethernet

WLAN

Security

System

## Mobile Connection

3

**Mobile Connection:**

Mobile data

When the mobile network is turned on, the device connects to the network automatically.

Data roaming:  Enable  Disable

Help admin Log Out

HUAWEI

Home | Statistics | SMS | Update | **Settings** | More

Quick Setup

Dial-up

Mobile Connection

Profile Management

**→ Network Settings**

Ethernet

WLAN

Security

System

## Network Settings

4

**Network**

Preferred mode:

Recommend to select "Auto" if you don't know the network type.

**Network Search**

Mode:

How to subscribe for a new Data plan



## 1. I get informed

- Informed by TVL sales agent @ TVL counter
- Flyers | Magalogue | News paper
- SMS
- Billboard

## 2. I buy

- I Visit TVL shop
- Sales agent configure my Mifi device and Activate my Sim card
- I pay for the Mifi Device and Sim card

## 3. I Subscribe to a 30 Days Mifi plan

- Log in to the Web Management portal (address: <http://192.168.1.1>, for Alcatel Mifi, default Password: admin) or on <http://192.168.1.1> for Huawei mifi
- Click on **SMS Tab** on Home Page
- Click on **New Message** on the SMS Menu
- On message pop up window, Sent “**buy keyword**” on sms content and sent to **183**  
e.g.: Send “**buy 3GB**” to 183

